


OUTDOOR WALL

ASSORTED FINISHES



A | **9234 AZ**
Outdoor Wall



A | 9234 BA
Outdoor Wall



A | 9234 WH
Outdoor Wall



B | 9236 AZ
Outdoor Wall

C | 9834 WH
Outdoor Ceiling

OUTDOOR WALL

	ITEM #	FINISH	INCAND. BULB	W	H	EXT.	HCWO	NOTES
A	9234	AZ, BA, WH	(1) 65W (M) BR-30	4.75	7	7	3.5	Ⓢ Ⓛ Ⓜ Ⓟ (13-15W CFL)
B	9236	AZ	(1) 120W (M) BR-40	6	7.75	8.5	4	Ⓢ Ⓛ Ⓜ Ⓟ (13-15W CFL)
C	9834	WH	(1) 65W (M) BR-30 ♦	4.5	8.5	---	---	Ⓒ Ⓜ Ⓟ (23-30W CFL)
D	9244	AZ, BA, WH	(2) 65W (M) BR-30	4.75	12	7	6	Ⓓ Ⓜ Ⓟ (13-15W CFL)
E	9246	AZ, BA, WH	(2) 120W (M) BR-40	6	15	8.5	7.5	Ⓓ Ⓜ Ⓟ (23-30W CFL)

Measurements shown in inches.



PATH LIGHTS PL-17 SERIES



TYPE

SPECIFICATIONS

CONSTRUCTION: 2" Extruded aluminum or brass L-shape design; matching cast aluminum or cast brass end cap

LENS: High impact sandblasted flat glass

LAMP SUPPLIED: 20w T4 S.C. Halogen, 10,000 hours average rating (20w max)

LAMP OPTIONS: We recommend 10,000 hours average rating Xenon (X) or 2.2w 50,000 hours average rating OMNI-2 LED (-LED2)

SOCKET: Single contact bayonet, brass nickel plated lamp socket screw shell (Bx15x)

WIRING: Black 3 foot 18/2 zip cord from base of fixture (12v only)

For 25 foot 16/2 fixture lead wire add -25F to catalog number

CONNECTION: FA-05 Quick Connector (not supplied) from fixture to main cable (12/2, 10/2 or 8/2 only) 12v only


MOUNTING: Aluminum: FA-03 black 9" ABS stake, tapped 1/2" NPS

Brass: FA-03-LG black 9" oversize ABS stake, tapped 1/2" NPS

FINISH: Aluminum - Black texture polyester powder coat. Optional finishes available
Brass - Unfinished brass. Optional finishes available

BLACK FINISH

2mpt
LED

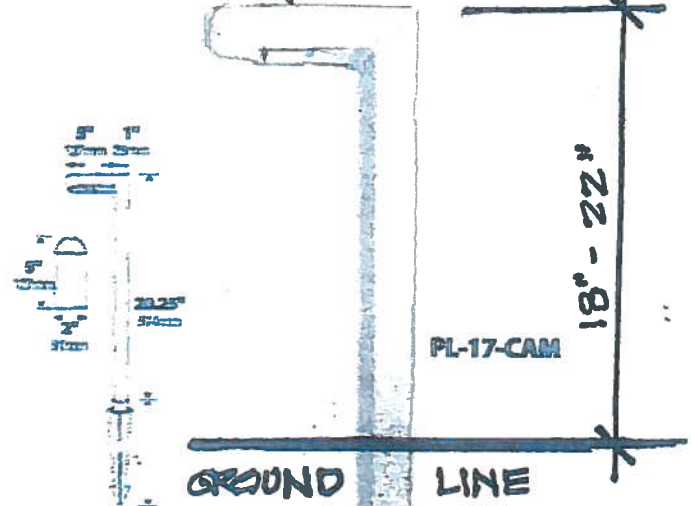


ORDERING INFORMATION


CATALOG NO.	DESCRIPTION	LAMP	SHIP WEIGHT
PL-17-BLT	2" Extruded Aluminum Path Light	20w T4 Halogen	2.9 lbs.
PL-17-BRS	2" Extruded Brass Path Light	20w T4 Halogen	4.0 lbs.

TOTAL OF 30 PROPOSED

IP54

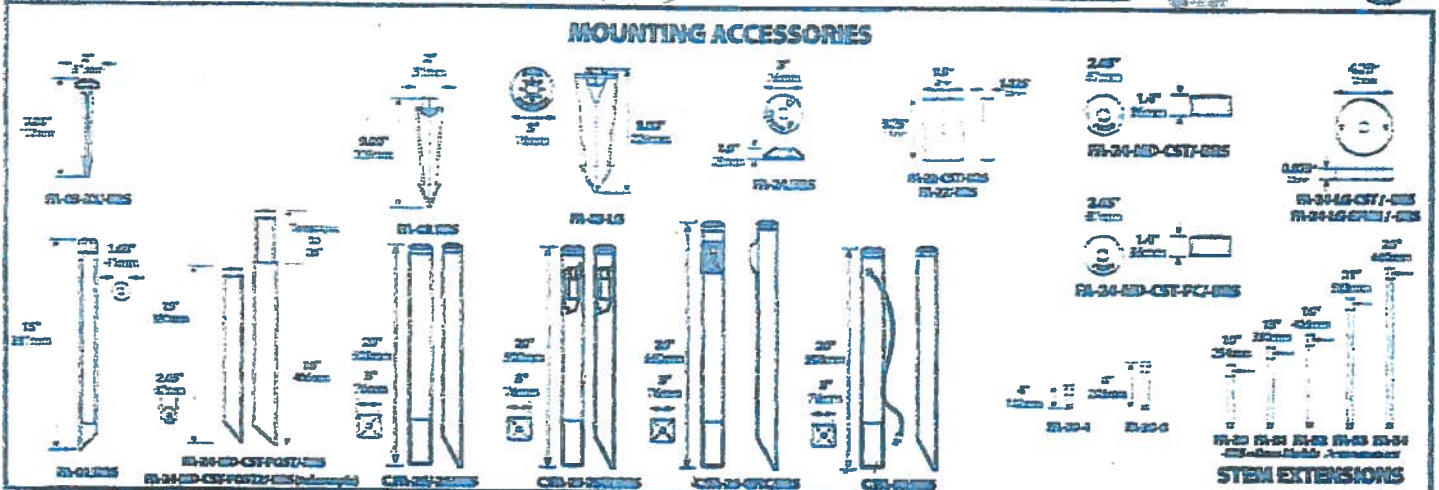

LIGHT DISTRIBUTIONS AND PHOTOMETRICS



JOB INFORMATION

Type:	Date:
Job Name:	
Est. No.:	
Lamp:	
Specimen:	
Contractor:	
Notes:	
FOCUS INDUSTRIES INC. 3901 COMMERCIAL DRIVE LAUREL, CA 92043	
www.focusindustries.com info@focusindustries.com (619) 620-1200 • FAX (619) 620-6000	

-BLT	-ATV	-BRT	-CAM	-WTX	-HTX	-RST	-WBR	-WBR	-STU	-RBY	-CPR	-TRC	-BAR/CAN	-BAV/CAN	-BAT
------	------	------	------	------	------	------	------	------	------	------	------	------	----------	----------	------

FEBRUARY 8, 2018

**RICHARD
HUBBELL
&
ASSOCIATES**
RICHARD HUBBELL, INC.

P.O. BOX 1151
SEDONA, AZ 86339
PH (928) 282-9477
FAX (928) 282-0108

MEMORANDUM :

SUBMITTED TO :

CITY OF SEDONA COMMUNITY DEVELOPMENT DEPARTMENT

SUBJECT :

JORDAN ROAD CONDOMINIUMS PROJECT
APPLICATION FOR DRO HEARING / REVIEW

RESPONSE TO DEPARTMENT REVIEW COMMENTS FROM JOHN DAVIS, FIRE MARSHALL,
CITY OF SEDONA FIRE DEPARTMENT

MESSAGE :

FIRE MARSHALL DAVIS BROUGHT UP SEVERAL ITEMS DURING HIS REVIEW OF THIS PROJECT. I REVIEWED HIS CONCERNS IN A PHONE CONVERSATION WITH HIM AND REVIEWED THE LANDSCAPE PLAN TO DETERMINE IF THE PLAN CONTAINED ANY AREAS OF HIS CONCERN AND DETERMINED THAT THE PLAN WAS IN COMPLIANCE WITH " Fire Wise Landscape Principles" WHICH WERE THE BASIS FOR HIS CONCERNS . MY FINDINGS ARE SUMMARIZED BELOW.

- * there are no large tree proposed near the building to allow branch structures over rooftops
- * there are no corridors of trees that would provide an unbroken chain of fire fuel
- * the density of shrubs near the building walls are not excessive and are adjacent to non-combustible masonry material. The density of shrubs is in compliance with city code to visually break up perimeter wall masses , soften the building and provide the recommended beautification required by code and the "design review manual "
- * proposed shrubs under proposed trees are minimal and those shrubs are low growing, not susceptible to fire occurrence and pose no fire threat .

IN SUMMARY, THE PROPOSED LANDSCAPE PLAN IS IN COMPLIANCE WITH " Fire Wise Landscape Principles" AND WOULD NOT CREATE A SOURCE OF UNDESIREABLE FIRE FUEL NOR CREATE NEGATIVE CONDITIONS FOR FIRE PREVENTION OR SUPPRESSION. FIRE MARSHALL DAVIS IS TO BE COMMENDED FOR HIS PROFESSIONAL AND THOUGHTFUL REVIEW OF THIS PLAN.

END OF MEMORANDUM:

Richard Hubbell, Landscape Architect 2/8/18